

ZVI SERIES-TT 2-4178

EAN 8422202241784



Resine castors with stainless steel (AISI 304) components. Especially indicated to stand high temperatures and support high-loads up to 125 Kg.


It is used in: furnaces and light machinery. Mainly used in the industrial sector, aeronautic sector and automobile factories, food industry, vending machines, bakery machines, light machinery, containers and stainless steel constructions. Suitable for mechanical engineering projects by craftsmen and project executors.

TT: resine castor. Especially indicated to the industrial sectors.

Technical Data


Housing Type	Swivel
Fitting Type	Bolt hole
Braking System	Without Brake
Material	Phenolic Resin Wheel
Bearing	Plain
Diameter (mm)	80
Width of tyre (mm)	34
Plate hole diameter (mm)	12
Offset (mm)	77
Overall height (mm)	104
Load	100

CAD

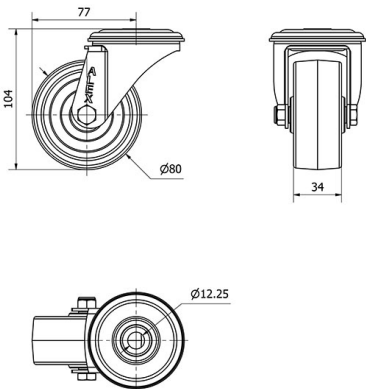

To visualize the image with higher resolution and more technical details, please access to the CAD section

Brackets



Made of high-quality pressed stainless steel (AISI 304) up to 3 mm. Bracket made completely of stainless steel, corrosion-free, resistant to petrol, diesel,oils and grease. Manufactured to European standards EN 12530/12532.

Similar products



2-1419

Wheel



Resin wheel up to 280°C when not in continuous use  
Temperature range: -30° ÷ +280°

