

ZV SERIES-POA 2-2922

EAN 8422202229225



Castors with white polypropylene centre and soft blue injected polyurethane tyre with a hardness of 80° Shore A. Especially indicated to support high-loads up to 250 Kg.

It is used in: logistics transport tools, repair shops, outdoor areas, internal logistics, tool trolleys, tubular carts, pneumatic factories, internal logistics, tranport tools, elevating platforms, transport carts, ladders, sweeping machines, polishing machines, packaging machines, conveyor belts, mobile cranes, elevating driven carts, boilers, cabinetmaker's, metalworks, agricultural farms, elevating tables, meat industry, containers and sport centres.

Mainly used in the aeronautic sector, railway, automobile factories, food industry, reappear shops and industrial activities.


Suitable for mechanical engineering projects by draftsmen and project executors.

POA: quieter rolling and vibrations absorption, clean and elastic. Very good wear resistance. Great resistance to oils.

Technical Data


Housing Type	Swivel
Fitting Type	Plate
Braking System	Wheel Brake And Fork
Material	Polyurethane
Hardness of tread	80° SHORE A
Bearing	Roller
Diameter (mm)	125
Width of tyre (mm)	32
Plate dimensions (mm)	106x86
Distance between holes (mm)	86/80x60
Plate hole diameter (mm)	8
Offset (mm)	107
Overall height (mm)	155
Load	175
Unit Weight of the wheel (kg)	1.044
Volume (cm ³)	2493

CAD

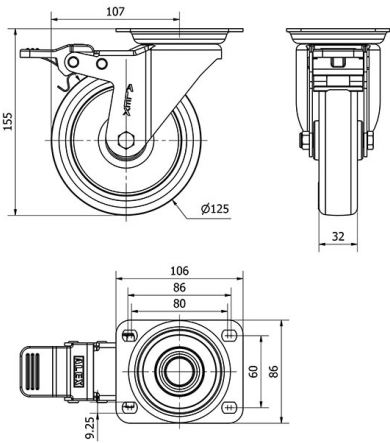

To visualize the image with higher resolution and more technical details, please access to the CAD section

Brackets



Made of pressed steel up to 4 mm. Finish: zinc plated finish. Double ball bearing in the swivel head. Universal model for medium-duty loads. Manufactured to European standards EN 12530/12532.

Similar products



2-2916



2-2919

Wheel



Blue soft polyurethane tyre on white polypropylene centre. 80° shore A

Temperature range: -25° ÷ +80°

