

ZV SERIES-PS 2-1355

EAN 8422202213552



Black rubber castors. Especially indicated to support high-loads up to 215 Kg.


It is used in: tool trolleys, tubular carts, internal logistics, mobile platforms, transport tools, elevating platforms, repair shops, food trolleys, kitchen, canteen, dining room, restaurant, food industry, logistics for military missions material, tool transport, compressors, ladders, sweeping machines, polishing machines, welding, cement mixers, cranes, packaging machines, conveyor belts, mobile cranes, trailers, light machinery, cabinetmaker's, locksmith's, metalworks, agricultural farms, waste containers, containers, roll containers and transport cages.

PS: smooth and noiseless castor. High floor protection. Absorption to impacts and vibrations.

Technical Data


Housing Type	Swivel
Fitting Type	Bolt hole
Braking System	Wheel Brake And Fork
Material	Rubber
Bearing	Plain
Diameter (mm)	200
Width of tyre (mm)	47
Plate hole diameter (mm)	12
Offset (mm)	155
Overall height (mm)	236
Load	215
Unit Weight of the wheel (kg)	2.875
Volume (cm <sup>3</sup> )	4671

CAD

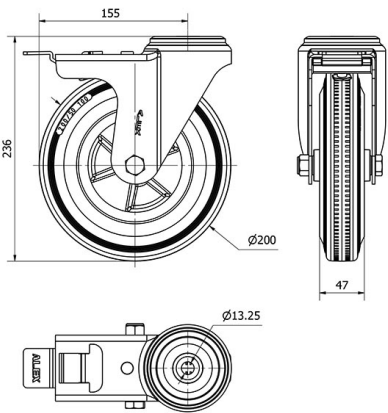

To visualize the image with higher resolution and more technical details, please access to the CAD section

Brackets



Made of pressed steel up to 4 mm.Finish: zinc plated finish.Double ball bearing in the swivel head.Universal model for medium-duty loads.Manufactured to European standards EN 12530/12532.

Similar products



2-1027

Wheel



Rubber tyre on polypropylene centre  
Temperature range: -20° ÷ +60°

